


RTD PROBES

Resistance Temperature Detector

SERIES 340 RTD PROBE (Resistance temperature Detector)

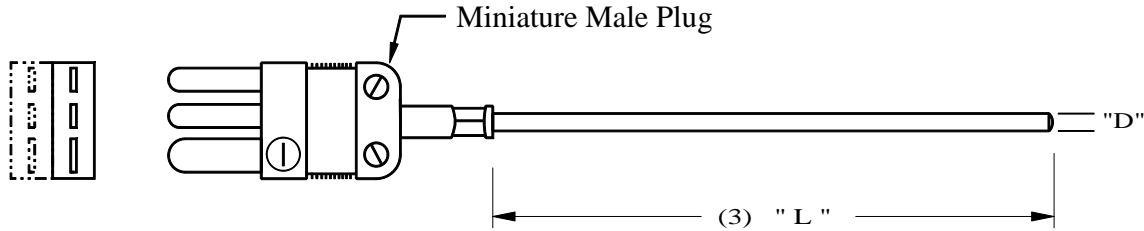

HOW TO ORDER



(1) Calibration & Configuration

	Code	Calibration	Configuration
	P21	"Single Element" 100 ohm	2 Wire
	P22	"Dual Element" 100 ohm	2 Wire
	P31	"Single Element" 100 ohm	3 Wire
	P32	"Dual Element" 100 ohm	3 Wire
	P41	"Single Element" 100 ohm	4 Wire
	P42	"Dual Element" 100 ohm	4 Wire
			Dual 3 Wire
			Single 4 Wire
			Dual 4 Wire

Please see other pages for flexible lead probes and all types of Thermocouple probes.

(2) Size & Sheath

Code	Dia.	Sheath Material
030	.188"	304 Stainless Steel
031		316 Stainless Steel
032		Inconel 600
040	.250"	304 Stainless Steel
041		316 Stainless Steel
042		Inconel 600
050	.312"	304 Stainless Steel
051		316 Stainless Steel
052		Inconel 600
060	.375"	304 Stainless Steel
061		316 Stainless Steel
062		Inconel 600

Sheath

Dia.

(4) Optional Adjustable Fittings

Code	Thread	Material
SA2	1/8" NPT	Stainless Steel
BA2	Max. .250" Dia.	Brass
SA4	1/4" NPT	Stainless Steel
BA4	Max. .375" Dia.	Brass
SA6	3/8" NPT	Stainless Steel
BA6		Brass
SA8	1/2" NPT	Stainless Steel
BA8		Brass

Adjustable Fitting

Stainless Steel or Brass