


RTD SENSORS

Resistance Temperature Detector

SERIES 350 RTD Sensor (Resistance temperature Detector)

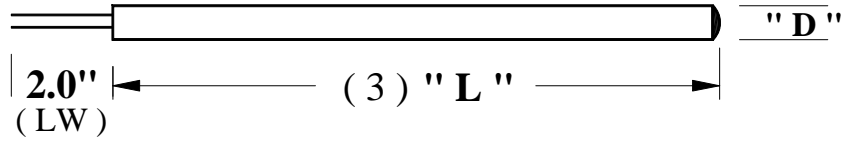

HOW TO ORDER



(1) Calibration & Configuration

	Code	Calibration	Configuration
	P21	" Single Element" 100 ohm	2 Wire
	P22	" Dual Element" 100 ohm	2 Wire
	P31	" Single Element" 100 ohm	3 Wire
	P32	" Dual Element" 100 ohm	3 Wire
	P41	" Single Element" 100 ohm	4 Wire
	P42	" Dual Element" 100 ohm	4 Wire

(2) Size & Sheath

Code	Dia.	Sheath Material
030	.188"	304 Stainless Steel
031		316 Stainless Steel
032		Inconel 600
040	.250"	304 Stainless Steel
041		316 Stainless Steel
042		Inconel 600
050	.312"	304 Stainless Steel
051		316 Stainless Steel
052		Inconel 600
060		304 Stainless Steel
061	.375"	316 Stainless Steel
062		Inconel 600

(4) Optional Lead Wires (LW)

Code	Lead Insulation Type
BL *	Bare Leads (Solid)
GG *	Glass \ Glass Insulation
PP *	PVC \ PVC Insulation
PAP *	PVC \ PVC with Shield
SSO *	S\S Overbraided over Glass
CCD	Coiled Cord (5 Ft.)

(4) Optional Adjustable Fittings

Code	Thread	Material
SA2	1/8" NPT	Stainless Steel
BA2	Max. .250" Dia.	Brass
SA4	1/4" NPT	Stainless Steel
BA4	Max. .375" Dia.	Brass
SA6	3/8" NPT	Stainless Steel
BA6		Brass
SA8	1/2" NPT	Stainless Steel
BA8		Brass

* = Length in Inches (Example- BL3.5")

TEMTEX Temperature Systems, Inc

19053 W. US HWY 82, SHERMAN, TEXAS 75092

(800) 527-2009 - (903) 813-1500 - FAX (903) 813-1950

e-mail: temtex@temtex.net

WWW.TEMTEX.NET