


RTD SENSORS

Resistance Temperature Detector

SERIES 360 SHEATHED RTD SENSOR

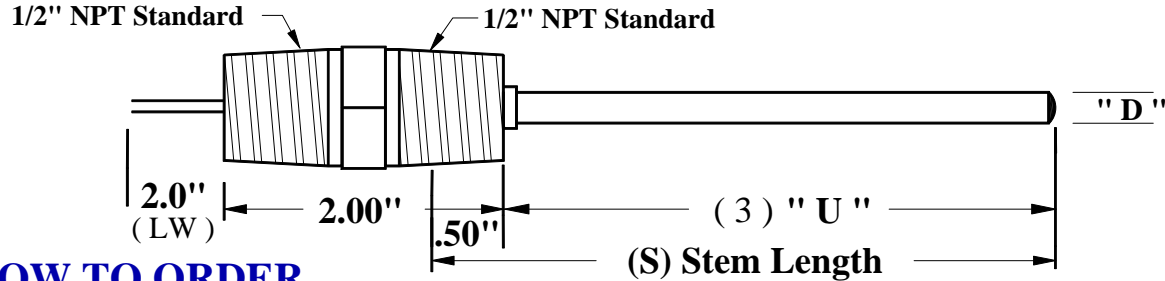

HOW TO ORDER

360 -
 (1) Calibration & Configuration -
 (2) Size & Sheath -
 (3) Length in Inches -
 (4) Options as required

(Example- 14.5")

(1) Calibration & Configuration

	Code	Calibration	Configuration
	P21	" Single Element" 100 ohm	2 Wire
	P22	" Dual Element" 100 ohm	2 Wire
	P31	" Single Element" 100 ohm	3 Wire
	P32	" Dual Element" 100 ohm	3 Wire
	P41	" Single Element" 100 ohm	4 Wire
	P42	" Dual Element" 100 ohm	4 Wire

(2) Size & Sheath

Code	Dia.	Sheath Material
020	.125"	304 Stainless Steel
021		316 Stainless Steel
022		Inconel 600
030	.188"	304 Stainless Steel
031		316 Stainless Steel
032		Inconel 600
040	.250"	304 Stainless Steel
041		316 Stainless Steel
042		Inconel 600
050	.312"	304 Stainless Steel
051		316 Stainless Steel
052		Inconel 600
060	.375"	304 Stainless Steel
061		316 Stainless Steel
062		Inconel 600
080	.500"	304 Stainless Steel
081		316 Stainless Steel
082		Inconel 600

(4) Optional Back to Back Bushing Sizes

Code	Thread # 1	Thread # 2	Material
S66	3/8" NPT	3/8" NPT	Stainless Steel
B66	3/8" NPT	3/8" NPT	Brass
S68	3/8" NPT	1/2" NPT	Stainless Steel
B68	3/8" NPT	1/2" NPT	Brass
S812	1/2" NPT	3/4" NPT	Stainless Steel
B812	1/2" NPT	3/4" NPT	Brass
S816	1/2" NPT	1" NPT	Stainless Steel
B816	1/2" NPT	1" NPT	Brass

(4) Optional Lead Wires (LW)

Code	Lead Insulation Type
BL *	Bare Leads (Solid)
GG *	Glass \ Glass Insulation
PP *	PVC \ PVC Insulation
PAP *	PVC \ PVC with Shield
SSG *	S\S Overbraid over Glass

* = Length in Inches (Example- BL3.5")