


THERMOCOUPLES PROBES

SERIES 140 THERMOCOUPLE PROBE

Compacted Magnesium Oxide Insulation

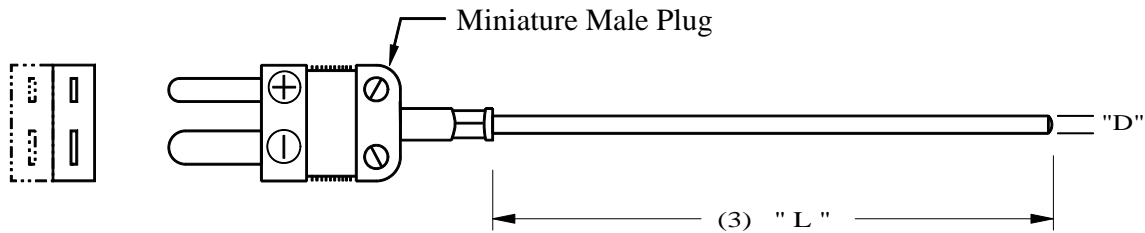

HOW TO ORDER

140 - (1) Calibration & Configuration - (2) Size & Sheath - (3) Length in Inches - (4) Options as required
(Example- 14.5")

(1) Calibration & Configuration		
Code	Calibration	Configuration
1TG	" T "	Grounded
		UnGrounded
1TU	Copper / Constantan	
1JG	" J "	Grounded
		UnGrounded
1JU	Iron / Constantan	
1KG	" K "	Grounded
		UnGrounded
1KU	Chromel / Alumel	
1EG	" E "	Grounded
		UnGrounded
1EU	Chromel / Constantan	
2TG	" T "	Grounded
		UnGrounded
2TU	Dual Element	
2JG	" J "	Grounded
		UnGrounded
2JU	Dual Element	
2KG	" K "	Grounded
		UnGrounded
2KU	Dual Element	
2EG	" E "	Grounded
		UnGrounded
2EU	Dual Element	



(2) Size & Sheath		
Code	Dia.	Sheath Material
005	.040"	304 Stainless Steel
006		316 Stainless Steel
007		Inconel 600
010	.063"	304 Stainless Steel
011		316 Stainless Steel
012		Inconel 600
020	.125"	304 Stainless Steel
021		316 Stainless Steel
022		Inconel 600
030	.188"	304 Stainless Steel
031		316 Stainless Steel
032		Inconel 600



(4) Optional Adjustable Fittings		
Code	Thread	Material
SA2	1/8" NPT	Stainless Steel
BA2	Max. .250" Dia.	Brass
SA4	1/4" NPT	Stainless Steel
BA4	Max. .375" Dia.	Brass
SA6	3/8" NPT	Stainless Steel
BA6		Brass
SA8	1/2" NPT	Stainless Steel
BA8		Brass



Please see other pages for flexible lead probes and all types of RTD Probes.